

SWIWIN SW300B

300N thrust micro turbine



SW300B complete set



Engine package
Contains
following items :



Engine and fix ring
V3 ECU
Brushless pump
Data terminal
Engine cable
Signal cable
Battery cable
Pump cable
Filter
Ball valve

specifications

▣ SW300B


- ▣ Diameter : 133mm
- ▣ Length : 332mm
- ▣ Body weight : 2500g
- ▣ Rpm range : 38,000-98,000
- ▣ Thrust : 300N (30Kg)
- ▣ Max exhaust temp : 700°C
- ▣ Max fuel consumption : 820g/min

Maintenance Interval:25-35hrs
Fuel : Jet A1 or Diesel
Lubrication : Mobil jet oil II 5%
Brushless starter
Brushless pump
Auto-restart function
Telemetry function
Running data recording
UART digital interface

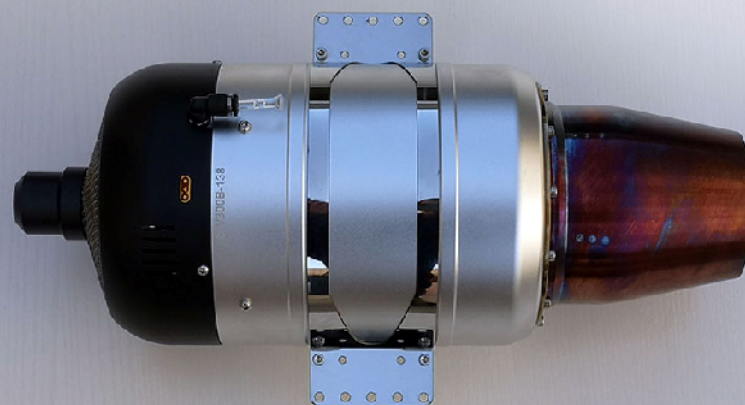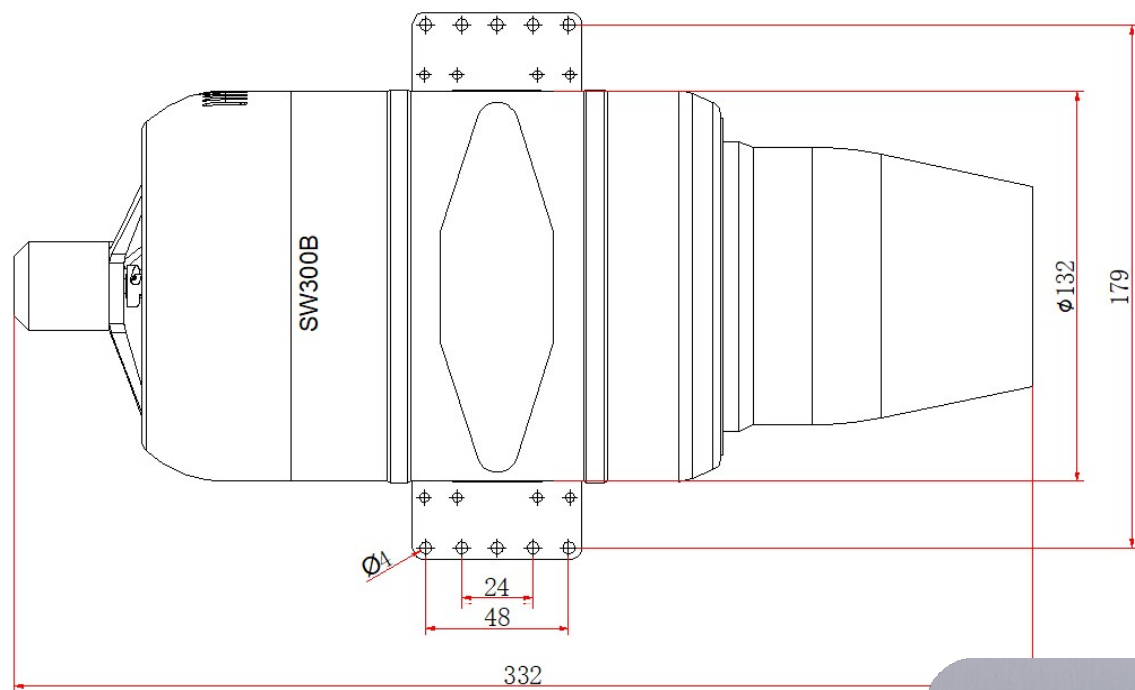

www.sw-jet.com SW300B

Brushless motor Starter

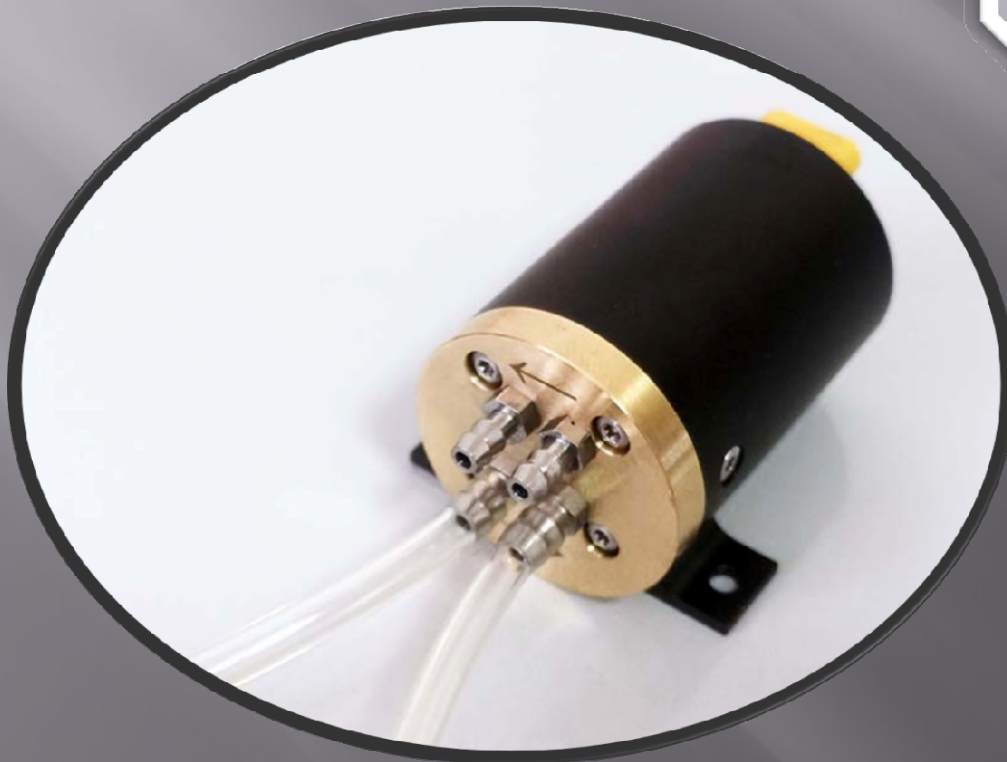

New version Brushless pump

V3 ECU & Color GSU




The SWIWIN V3 ECU was designed from the ground up and is based on 32 bit microprocessor functionality and designed specifically for SWIWIN Turbines.

The V3 ECU offers the following benefits:

- Data Logging
- Auto start
- Automatic Restart
- Color Screen visible in direct sunlight
- Configurable thrust curve with very fast throttle response
- Telemetry function
- BUS input
- UART Digital interface


Swiwin
SW300B

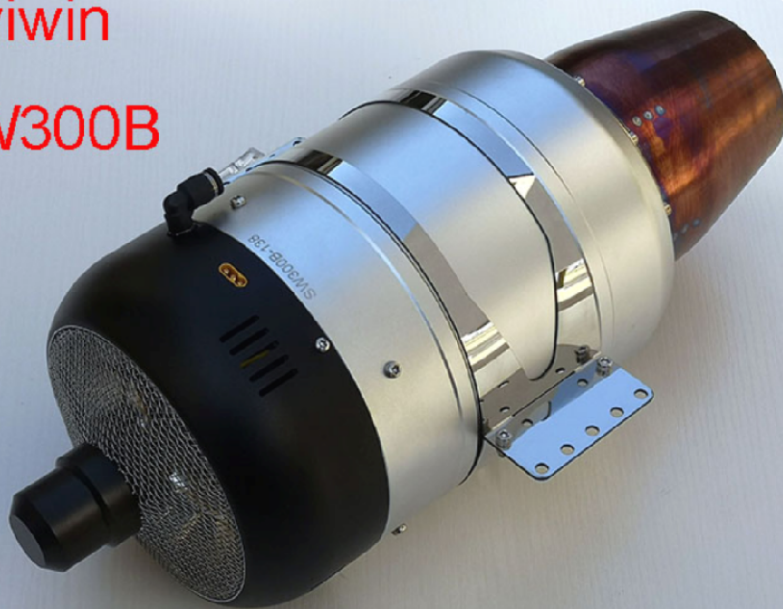

SW300B




System connection

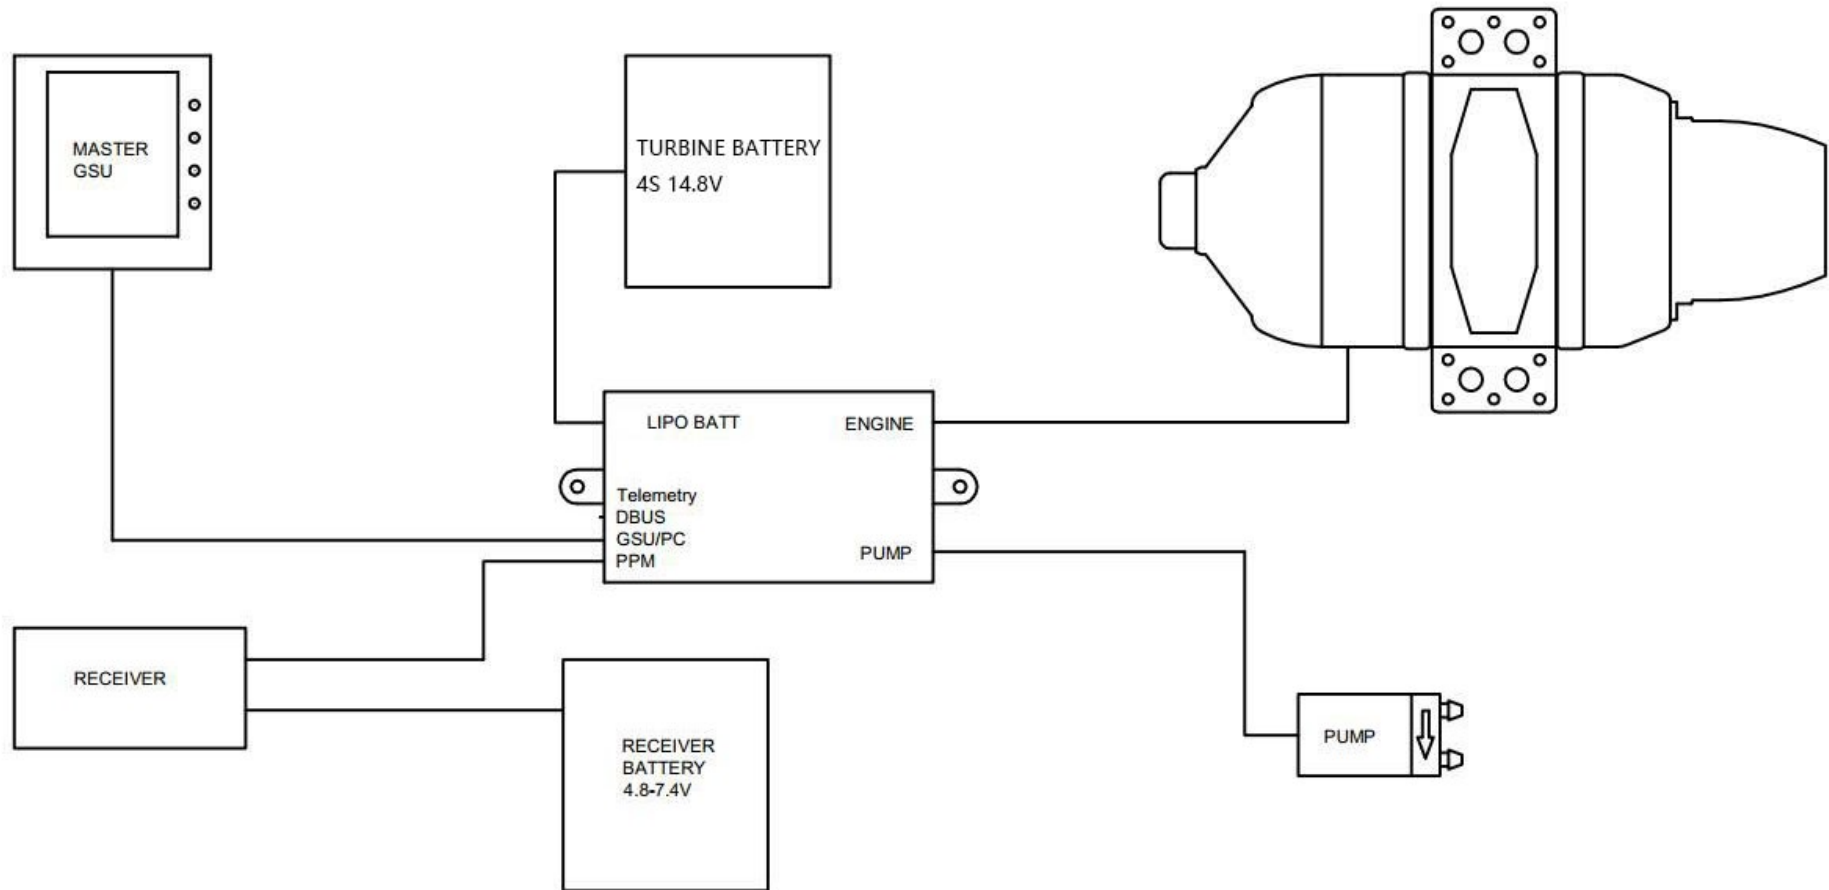

Note: SW300B use 4S battery

Fuel line connection

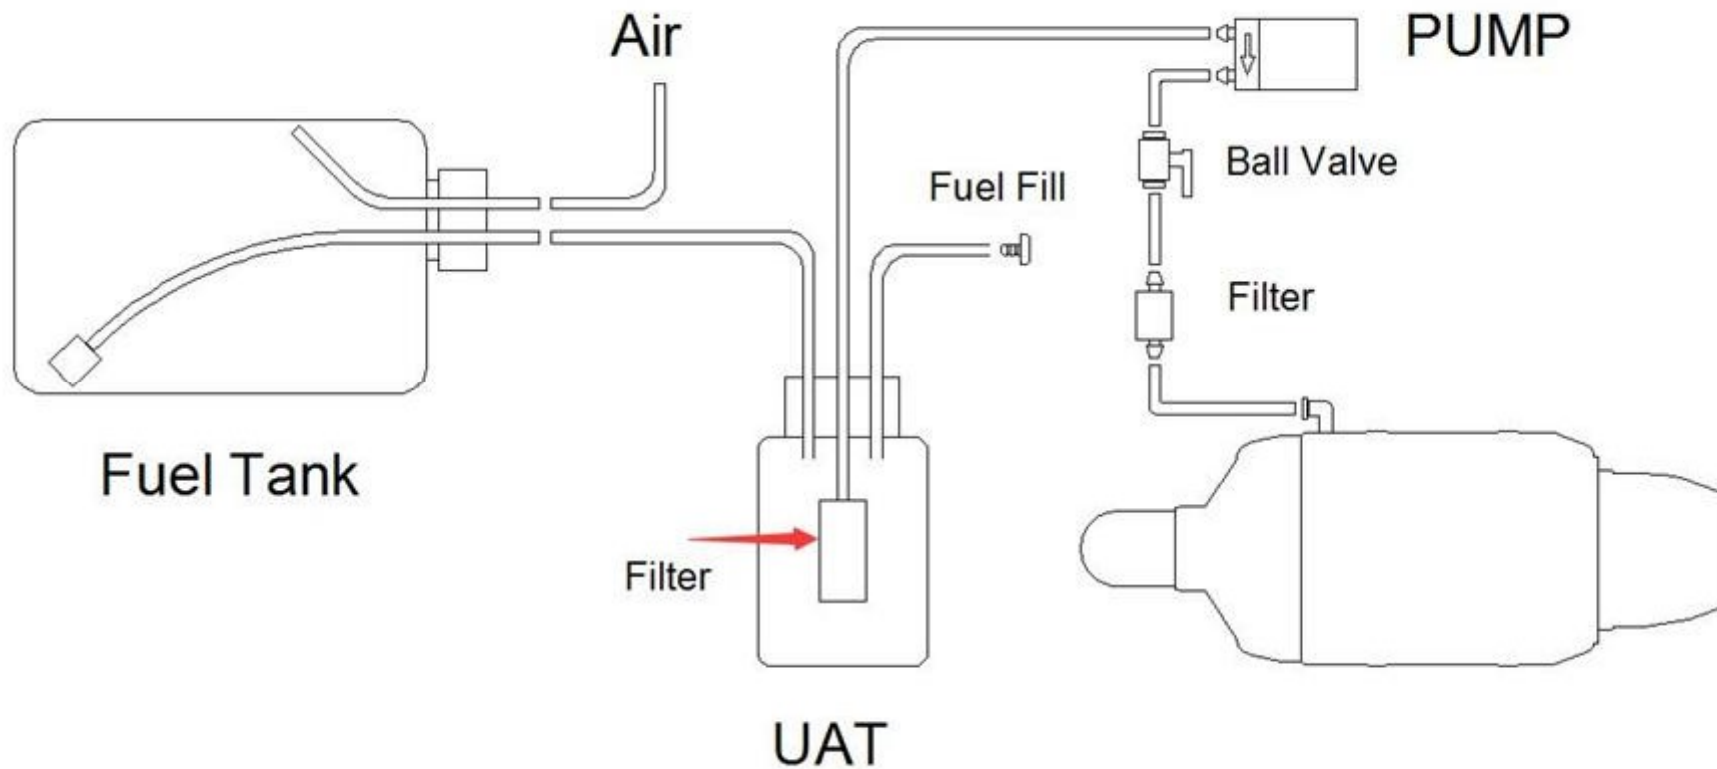

Product line spec



SWIWIN TURBINE SPEC

[illegible]